


## 26m<sup>3</sup>/hr 114mm x 114mm

IP Enclosures provide a wide range of ventilation products for electrical enclosures. The range consists of a modern Italian design with minimal external projection and allows for easy filter maintenance due to a front-opening grille. The configuration of the grille, seal gasket and filter mat provide an IP54 protection. All moulded parts are made of highly resistant and self-extinguishing ABS. IP Enclosures ventilation products are manufactured to the highest quality in Italy.



Features	Unit	IP-V1000	IP-V1100	IP-V1101	IP-V1112	IP-V1124
Air flow rate (free blow)	m <sup>3</sup> /h	-	26 (30)		26	
Air flow rate with exit filter	m <sup>3</sup> /h	-	15 (18)		15	
Power supply	V/Hz	-	230 / 50-60	115 / 50-60	12DC	24DC
Dimensions HxWxD	mm	114x114x27	114x114x73		114x114x60	
Power consumption	W	-	13 (12)		3	4
Current consumption	A	-	0.10 (0.08)	0.14 (0.12)	0.25	0.16
Overcurrent protection	-	-	impedance			
Electrical connection	-	-	3-poles spring terminals *		2-poles spring terminals *	
Duty cycle	-	-	100%			
Operating temperature	°C (°F)	-	-10 / +70 (+14/+158)			
Protection degree / Class	-	IP54	IP54 / Class I			
Noise level	dB(A)	-	30 (35)		35	
Flow direction	-	-	reversible, default factory setting outside-in			
Bearing	-	-	ball			
Filter mat EN779	-	G2	G2			
Service life (at 40°C)	hr	-	50 000			
Material	-	-	ABS UL94V-0 color RAL7035			
Wall thickness	mm	-	1.2 - 2.4			
Gasket	-	-	foam seal gasket			
Weight (with packaging)	kg	0.09(0.11)	0.41(0.46)		0.20(0.25)	
Package dimensions H x W x D	mm	125x125x35	125x125x80			
Mounting	-	-	fast clip-on			
Conformity/Certifications	-	-	CE			

\* 0.5-2.5mm<sup>2</sup>

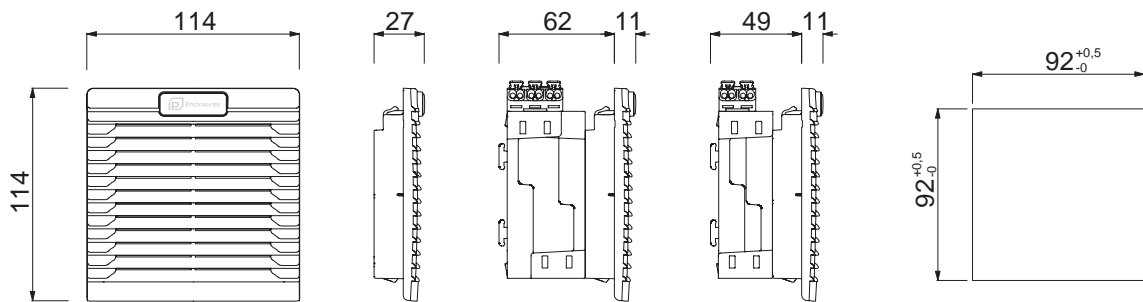

IP-V1100

IP-V1000

IP-V1100-1101

IP-V1112-1124

Cut-Out Dimensions