

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Lever-type fuse terminal block, black, for 6.3 x 32 mm G fuse inserts

Your advantages

- An extremely compact design
- Test connection on both sides in safety lever
- Tested for railway applications

Commercial Data

Item number	3046401
Packing unit	50 pc
Minimum order quantity	50 pc
Sales Key	BE1134
Product Key	BE1134
Catalog Page	Page 173 (C-1-2019)
GTIN	4046356055802
Weight per Piece (including packing)	24.9 g
Weight per Piece (excluding packing)	24.9 g
Customs tariff number	85369095
Country of origin	PL

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

Technical Data

Product properties

Product type	Fuse terminal block
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics / ...
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W
Fuse	G / 6,3 x 32
Maximum current with single arrangement	10 A
Maximum power dissipation	max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)
	max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)
	max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)
	max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit)

Connection data

Number of connections per level	2
Nominal cross section	6 mm ²

Level 1 above 1 below 1

Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm
Stripping length	10 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.2 mm ² ... 10 mm ²
Cross section AWG	24 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 10 mm ²
Conductor cross section, flexible [AWG]	24 ... 8 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 6 mm ²

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 6 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 2.5 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 2.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	10 A
Maximum load current	10 A (the current is determined by the fuse used)
Nominal voltage	630 V
Nominal cross section	6 mm ²

Dimensions

Width	8.2 mm
Height NS 35/15	83.1 mm
Height NS 35/7,5	75.6 mm
Length	57.8 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
---------------------------------	---

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

UT 6-HESI (6,3X32) - Fuse modular terminal block




3046401

<https://www.phoenixcontact.com/au/products/3046401>

Drawings

Application drawing

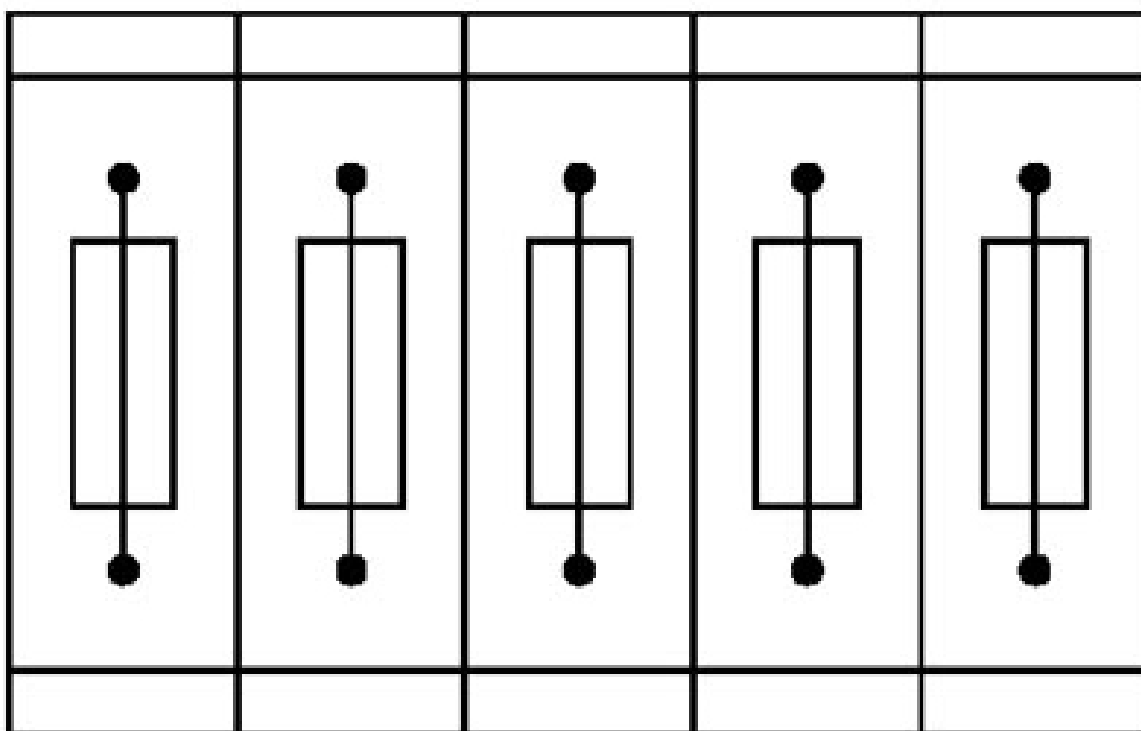

Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks


UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

Circuit diagram

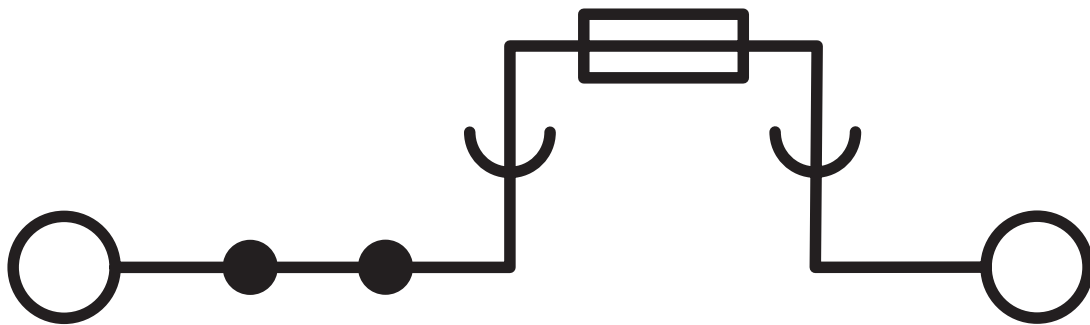


UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>

Application drawing

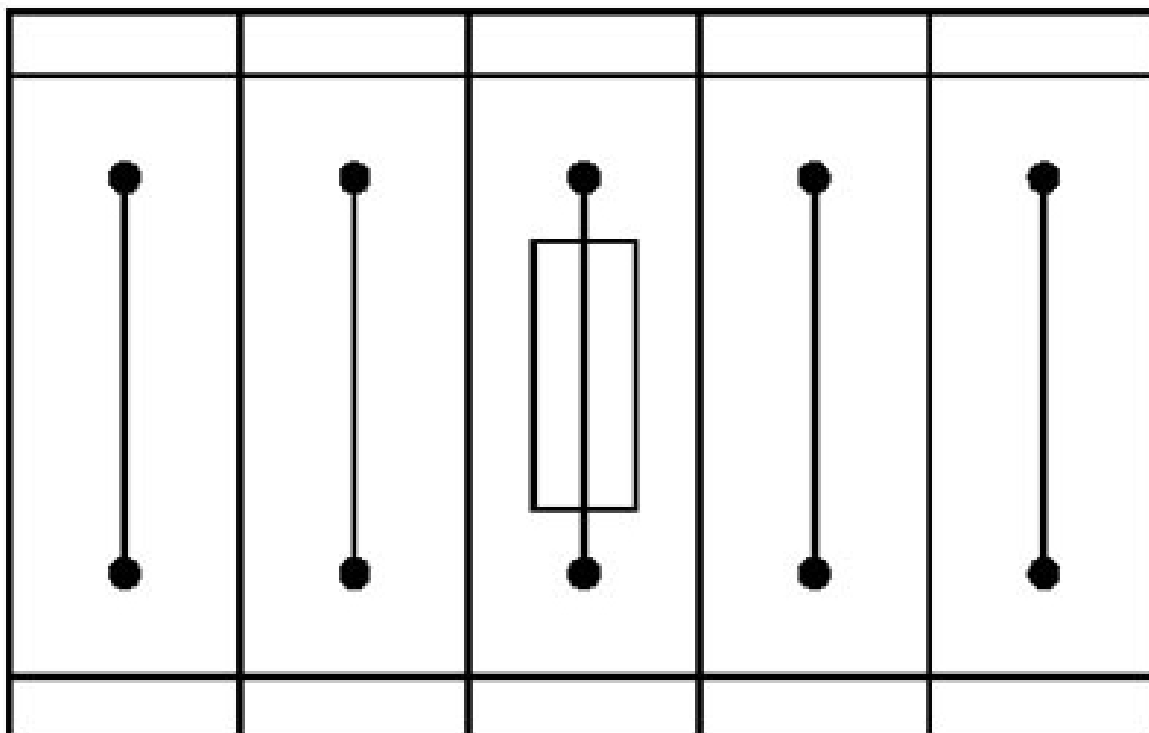

Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks


UT 6-HESI (6,3X32) - Fuse modular terminal block




3046401


<https://www.phoenixcontact.com/au/products/3046401>


Approvals

 CSA Approval ID: 13631				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B	600 V	10 A	24 - 8	-
Use group C	600 V	10 A	24 - 8	-


 IECEE CB Scheme Approval ID: NL-23159_A1				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	250 V	10 A	-	-

 EAC Approval ID: RU C-DE.AI30.B.01102				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B	600 V	10 A	24 - 8	-
Disconnect terminal block function	600 V	16 A	24 - 8	-
Use group C	600 V	10 A	24 - 8	-
Disconnect terminal block function	600 V	16 A	24 - 8	-

 KEMA-KEUR Approval ID: 71-104946				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	250 V	10 A	-	-

 RS Approval ID: 22.44.01.00083.250				
--	--	--	--	--

 EAC Approval ID: RU C-DE.BL08.B.00534				
---	--	--	--	--

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>



UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 8.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>

Accessories

 Note: Applying some accessories below might limit this product.


FBS 2-8 - Plug-in bridge

3030284

<https://www.phoenixcontact.com/au/products/3030284>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 41 A

FBS 3-8 - Plug-in bridge

3030297

<https://www.phoenixcontact.com/au/products/3030297>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 41 A

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>

FBS 4-8 - Plug-in bridge

3030307

<https://www.phoenixcontact.com/au/products/3030307>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 41 A


FBS 5-8 - Plug-in bridge

3030310

<https://www.phoenixcontact.com/au/products/3030310>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 41 A

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>


FBS 10-8 - Plug-in bridge

3030323

<https://www.phoenixcontact.com/au/products/3030323>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 41 A


FBS 6-8 - Plug-in bridge

3032470

<https://www.phoenixcontact.com/au/products/3032470>



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: red

 Max. current carrying capacity: 41 A

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>

FBSR 2-8 - Plug-in bridge

3033808

<https://www.phoenixcontact.com/au/products/3033808>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 32 A


FBSR 3-8 - Plug-in bridge

3001597

<https://www.phoenixcontact.com/au/products/3001597>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 32 A

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>


FBSR 4-8 - Plug-in bridge

3000585

<https://www.phoenixcontact.com/au/products/3000585>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A

FBSR 5-8 - Plug-in bridge

3033809

<https://www.phoenixcontact.com/au/products/3033809>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 32 A

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>

FBSR 10-8 - Plug-in bridge

3001599

<https://www.phoenixcontact.com/au/products/3001599>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 32 A

FBS 2-8 CT - Plug-in bridge

3033830

<https://www.phoenixcontact.com/au/products/3033830>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: orange

 Max. current carrying capacity: 41 A

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>

FBS 3-8 CT - Plug-in bridge

3033831

<https://www.phoenixcontact.com/au/products/3033831>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: orange

 Max. current carrying capacity: 41 A


FBS 4-8 CT - Plug-in bridge

3033832

<https://www.phoenixcontact.com/au/products/3033832>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: orange

 Max. current carrying capacity: 41 A

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>

FBS 10-8 CT - Plug-in bridge

3033833

<https://www.phoenixcontact.com/au/products/3033833>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: orange

 Max. current carrying capacity: 41 A


FBS 2-8 BU - Plug-in bridge

3032567

<https://www.phoenixcontact.com/au/products/3032567>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 41 A

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>


FBS 3-8 BU - Plug-in bridge

3032570

<https://www.phoenixcontact.com/au/products/3032570>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 41 A


FBS 4-8 BU - Plug-in bridge

3032583

<https://www.phoenixcontact.com/au/products/3032583>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 41 A

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>


FBS 5-8 BU - Plug-in bridge

3032596

<https://www.phoenixcontact.com/au/products/3032596>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 41 A


FBS 6-8 BU - Plug-in bridge

3032677

<https://www.phoenixcontact.com/au/products/3032677>



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: blue

 Max. current carrying capacity: 41 A

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>




FBS 10-8 BU - Plug-in bridge

3032606

<https://www.phoenixcontact.com/au/products/3032606>

Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: blue



 Max. current carrying capacity: 41 A

SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/au/products/1205066>

Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip



UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>



X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/au/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/au/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>



NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/au/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/au/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>



NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/au/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/au/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/au/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/au/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>



NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/au/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/au/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/au/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/au/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>



NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/au/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/au/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/au/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/au/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/au/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/au/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401


<https://www.phoenixcontact.com/au/products/3046401>

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/au/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/au/products/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

UT 6-HESI (6,3X32) - Fuse modular terminal block




3046401

<https://www.phoenixcontact.com/au/products/3046401>

ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/au/products/1052002>




Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/au/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/au/products/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/au/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/au/products/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/au/products/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

UT 6-HESI (6,3X32) - Fuse modular terminal block




3046401

<https://www.phoenixcontact.com/au/products/3046401>

ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/au/products/1052015>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/au/products/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

UT 6-HESI (6,3X32) - Fuse modular terminal block




3046401

<https://www.phoenixcontact.com/au/products/3046401>

ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/au/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

MPS-MT - Test plugs

0201744

<https://www.phoenixcontact.com/au/products/0201744>



Test plugs, with solder connection up to 1 mm² conductor cross section, color: gray

UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>

MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/au/products/0201663>

Insulating sleeve, color: white



MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/au/products/0201676>

Insulating sleeve, color: red



UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401


<https://www.phoenixcontact.com/au/products/3046401>

MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/au/products/0201689>

Insulating sleeve, color: blue



MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/au/products/0201692>

Insulating sleeve, color: yellow



UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/au/products/0201702>

Insulating sleeve, color: green



MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/au/products/0201728>

Insulating sleeve, color: gray



UT 6-HESI (6,3X32) - Fuse modular terminal block

3046401

<https://www.phoenixcontact.com/au/products/3046401>



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/au/products/0201731>

Insulating sleeve, color: black



PS-8 - Test plugs

3031005

<https://www.phoenixcontact.com/au/products/3031005>

Test plugs, Modular test plug, color: red



UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

DP PS-8 - Spacer plate

3036741

<https://www.phoenixcontact.com/au/products/3036741>



Spacer plate, length: 22.4 mm, width: 8.2 mm, height: 29 mm, number of positions: 1, color: red

PS-8/2,3MM RD - Test plugs

3048564

<https://www.phoenixcontact.com/au/products/3048564>



Test plugs, color: red

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

CLIPFIX 35 - End clamp

3022218

<https://www.phoenixcontact.com/au/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/au/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

UT 6-HESI (6,3X32) - Fuse modular terminal block



3046401

<https://www.phoenixcontact.com/au/products/3046401>

E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/au/products/0800886>

End clamp, width: 9.5 mm, color: gray



Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

customerservice@phoenixcontact.com.au